



PRESERVATIVE TREATED DOUBLE PRIMED

CLEAR FINGERJOINT w/SILLBOR TREATMENT AND DOUBLE EXTERIOR PRIMED

- Available in widths from 2" to 12", special order up to 18" width, custom cut to length and private labeling
- Every piece is coated on all sides with a high quality exterior grade primer
- Every piece is treated for extra protection by repelling termites, other bugs and decay

5 THINGS YOU NEED TO KNOW

1 Every batch of production is quality controlled

We subject all Treated Boards to triple cycle weathering, bonding and destructive tests to ensure adhesives and finishing will withstand extreme variations in temperature and humidity.

2 High quality substrate – all substrates are not created equal

During manufacturing, only high quality clear Radiata Pine is chosen for SILLBOR Treated Primed Pine Boards, ensuring product consistency, dimensionally stable profiles, and no service issues.

3 We only use exterior grade adhesives and primer

Weston knows that contractors and homeowners demand a high performing product that will maintain it's superior look and will be reliable under extremely demanding conditions.

4 Extra protection from the elements and insects

With SILLBOR treated lumber and two coats of exterior grade primer, these boards have the extra protection they need to withstand all climates and conditions, offering the highest reliability for boards.

5 Weston Guarantee


We are so confident in our product that we have included a 15 year Limited Warranty, protecting you and your investment plus SILLBOR additional treatment warranty. See reverse for details.



Finger joint primed boards



Suitable for exterior finishing

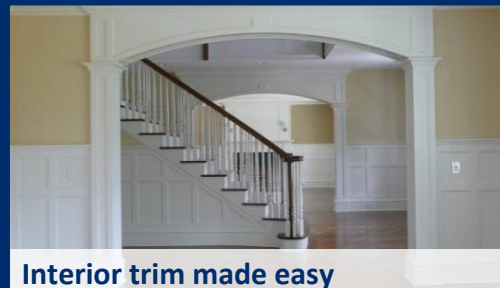

Interior trim made easy

General Specifications

		Pieces per unit	2"	3"	4"	5"	6"	8"	10"	12"
Moisture Content	8 - 12%									
Primer Paint	Exterior Grade	21/32"	504	306	216	162	126	108	72	72
		23/32"	448	272	192	144	112	96	64	64
Treatment	SillBor® SBX	1-1/8"			120	90	70	60	40	40



Limited Lifetime Warranty

15 Year Limited Warranty Terms and Conditions

Subject to the terms and conditions below, Weston Wood Solutions (“Weston”) warrants that its Preservative Treated Double Primed Pine Boards (the “Products”)

will be free from defects in material and manufacturing, which cause delamination or separation of the primer from substrate. The period of this limited warranty is fifteen years and begins on the date the distributor purchases the Products from Weston, provided the original homeowner or end-user into whose property any Products were originally installed still own or occupy the property. All rights to bring claims will terminate immediately upon the sale, transfer or abandonment of the property by the original homeowner or end user.

This limited warranty shall not apply to damages caused by events outside of Weston’s control including, but not limited to, (i) normal wear and tear and natural weathering of the surfaces such as deterioration or faults due to inherent physical properties of the wood such as shrinking, swelling, cupping, twisting, or resin bleed, (ii) problems due to misuse or abuse, improper handling, storage, or installation, (iii) damage caused by failure to follow the finishing, care, and maintenance instructions below or otherwise recommended by Weston, (iv) wood decay as a result of being exposed to other moist materials such as soil or wet cement, (v) damages caused by failure to follow proper building standards and codes and (vi) claims based on misstatements or misrepresentations of the Products by the distributor.

Weston shall not be held responsible for incidental, or consequential damages, or lost profits, and its liability shall, in all instances, whether any claims are based on contract, tort or other theories, be limited to the replacement of the defective Product or, at Weston’s option, crediting the account of the distributor for the purchase price of the Product determined to be defective. Weston shall not be held responsible for any labor or freight costs related to this warranty. THIS LIMITED WARRANTY CONSTITUTES THE ONLY WARRANTY MADE BY WESTON. ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXCLUDED.

This limited warranty is non-transferable. Weston shall not be a third party obligor or otherwise responsible under any warranty provided by any distributor or builder to any homeowner or other third party or end-user. Notwithstanding, any mention of the ultimate homeowner or builder who may use the Products, no party other than the distributor shall have any rights against Weston under this warranty or otherwise. All claims under this warranty must be based on documentation submitted to the original distributor of the products with proof of purchase and site and product conditions within 30 days of discovery of any defects. The distributor must cooperate with Weston with respect to any such claims and must notify Weston in writing of any such claims within a maximum of 30 days of such claims being submitted to the distributor and must supply Weston with all claims paperwork so as to enable Weston to verify all applicable claims documentation and site and product conditions.

For finishing, care, and maintenance, please see the instructions below:

Product Installation & Storage Summary

Indoor Installation

The Product should be installed only after the moisture content of the goods is brought into equilibrium within the internal environment. Store the Product in the same indoor facilities with the two faces exposed to the environment where the Product will be installed. We recommend a minimum of seven days for the Product to stabilize within the internal environment to reduce the potential for Product shrinking, swelling, cupping, or twisting after installation. Apply 2 coats of high quality acrylic paint after installation.

Outdoor Installation

A top coat must be applied as soon as possible, and within a maximum of 30 days of installation. For the best top coat results apply 2 coats of high quality exterior grade acrylic paint. Make sure the Product is absolutely dry before applying the top coat. The ends are specially susceptible to water migration which may contribute to swelling, grain raise, warping, twisting, cupping, bleeding, and peeling problems. All ends and edge cuts must be recoated thoroughly with high quality exterior grade primer and top coat. Caulk and recoat any nail or screw holes.

Storing and Handling

This Product needs to be handled with care. Especially prior to installation, it must be protected from direct sunlight, water, dirt and other elements. It should be stored in a dry location off the ground on even height blocks, and protected with a waterproof cover. Avoid leaving bundles open, and re-strap using protective material under the strapping. Do not store directly on a concrete floor or in a damp place.

Care and Maintenance

Any and all cuts notches or drill holes must be recoated thoroughly with high quality primer and top coat. The top coat should be re applied regularly on all surfaces according to the paint manufacturer’s instructions, and within a maximum of 3 years.